

www.element-designs.com

DN 80 CF Sliding Door System


Quote	Order
QUOIE	

Com	pany:						Email (or	fax) form to	your authoriz	ed distributor:
Cont	act Name:						Authorize	ed Distributo	or:	
	ess:						Branch Lo	ocation: _		
							Email / Fo	ax:		
City /	'State / Zip:							°e	element®	
Phon	e #:							Ph: (877) 332	2-3396 Fx: (704) 332-	3267
Fax #	<u> :</u> :							· ·	com orders@eleme	Ü
Email	l:						•		PO #:	
1	Door Type	(4) II	nsert Typ	e (sele	ect one)				lware Selec	
	minum Frame:	I	ındard Glo						nanual for hardwar	e specifications
☐ AF					ral D □ Reed stral □ Reed			llation (se	_	
		-	oked Grey			JEG (Horizonfal)			Single trackDouble track	
_ AF		I			w-Iron Satin (Ac	id Etched)			wall mount brackets f	
	& AF010 available ONLY with Backpained Glass inserts	• Bad	ckpainted	Glass	Inserts:		□ baiii i	ONLY sin	gle track, ONE plane	of travel)
	mm PARAPAN® blor:	Finish	(select one): oss	□Мо	itte		B. Plane	s of Travel	& Number of	f Doors
_		Color □ Wh	(select one) nite		arlett 🗆 Silv	vor.			1 PI	ane - 1 Door
	Profile Finish	☐ Blo			/e ☐ Bro	-			1 PI	ane - 2 Doors
•	odized Finish				cha □Ch :				2 PI	anes - 2 Doors
	tural Anodized		istom Color				 _ 			
	shed Stainless ome (AF003 & AF010 ONLY)	I			plies. Contact Element L ker, unless otherwise spec					anes - 3 Doors
	tic Gold (AF003 ONLY)			- '		cilled	☐ Office	er (Please Specif	y details in Special Ins	tructions)
	vder Coat Finish	1	rm® Resin		S:		C. Fasc	ia Cover F	inish	
□ Oil □ Wh	Rubbed Bronze ite Black								l 🗌 Oil Rubb	ed Bronze
_		1	rapan® Hiç Jari		oss inseris:		*Brushed Stailr	ness not available	☐ White	□Black
(3)	Opening Info	I	tallic Inser				D. Soft C	Close*		
will be i	ions of space where doors nstalled, used to calculate	I			Stainless L			t include		
height t	mensions. Use smallest to calculate door height.				□ Stainless L	am. (Horizontal)			per door - LEFT	
Heigh	nt (Left):		stom Etch:		ork must be supplied	subject to set			per door- RIGH s per door- LEF	
Heigh	nt (Center):	I	sitive Etch gative Etch		e. Contact Element D				ne mechanism, 34.25" fo	
Heigh	nt (Right):) INSERT	all inse	erts are 5/32" (4mm)	thick			or will be included	
Width	1:	7 til glass is			ot have etched tempered er. Refer to local building	-	noted. La	teral door bro	acket will be pre i	nstalled
Item	Qty Dimensions		in Divide		Element Des	igns Use Only			Hardware	Versione
	Width	Height	mm (See Page 2)	. ,	Price	Ext. Price			Brushed & ORB	Various Finishes
1			□yes				Knobs	Bar Pulls	Bar Pulls	Finger Pulls
2			□yes				☐ K001 ☐ K005	□P1-127 □P1-190	□ P1-76S □ P1-192S	☐ P2-42 ☐ P2-42S
3			□yes				□ K005	□P1-250	□P1-320S	☐ P2-42ORB
Spec	ial Instructions:				Hardware:		☐ K007	□P1-380	□ P1-76ORB	Other
					Subtotal:		□K008	□P1-640	□ P1-192ORB	
					Shipping:		☐ K009	□P1-880	□ P1-320ORB	
					TOTAL:		Q1Y:		☐ Drill for han (Must specify handle	



DN 80 CF Sliding Door System Quote Order



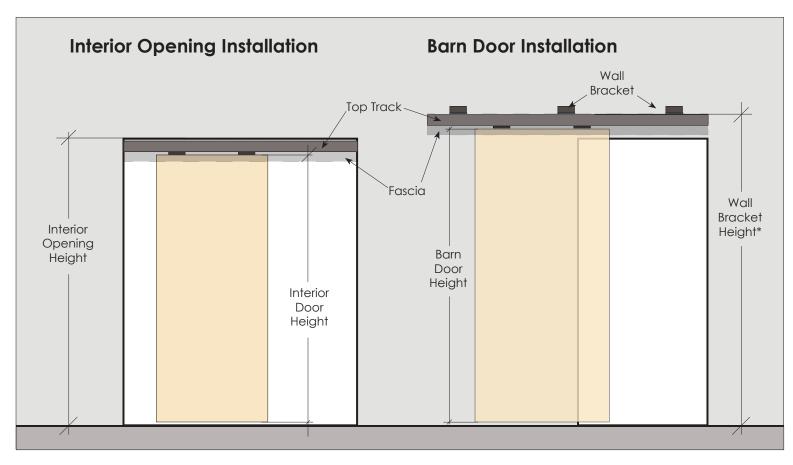

Door Dimension Calculations:

Interior Opening Installation:


Interior Door Height = Opening Height - 66mm

Door Width = (Opening width \div # of doors) + (profile width* \div 2) *See Element Designs catalog for profile width dimensions

Barn Door Installation:

Barn Door Height = Wall Bracket Height* - 66mm

*Wall Bracket Height measured from the BOTTOM of the bracket

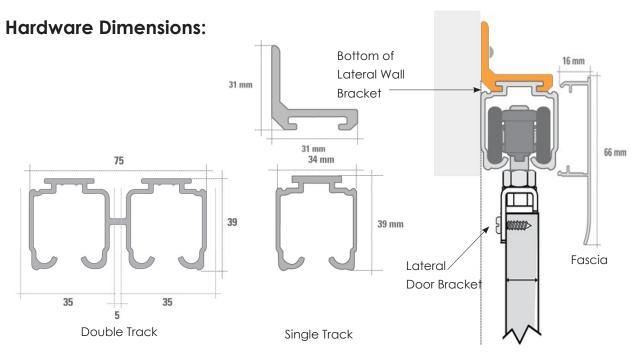




DN 80 CF Sliding Door System

Quote Order

Divider Rail Inserts & Locations:

*ONLY available with AF003, AF005, AF007, & AF009. Width = 3/4"

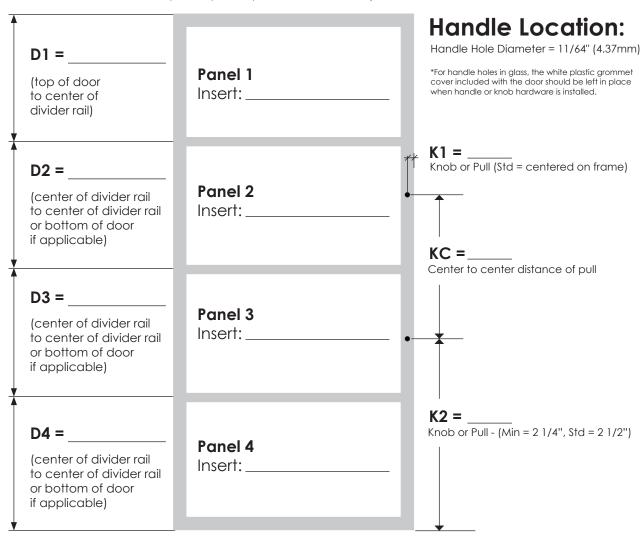

for additional information or customer support please call: (877) 332-3396